


# **SYNERGY**

## **AFFIX**

---

# **Weavers**

## **World**

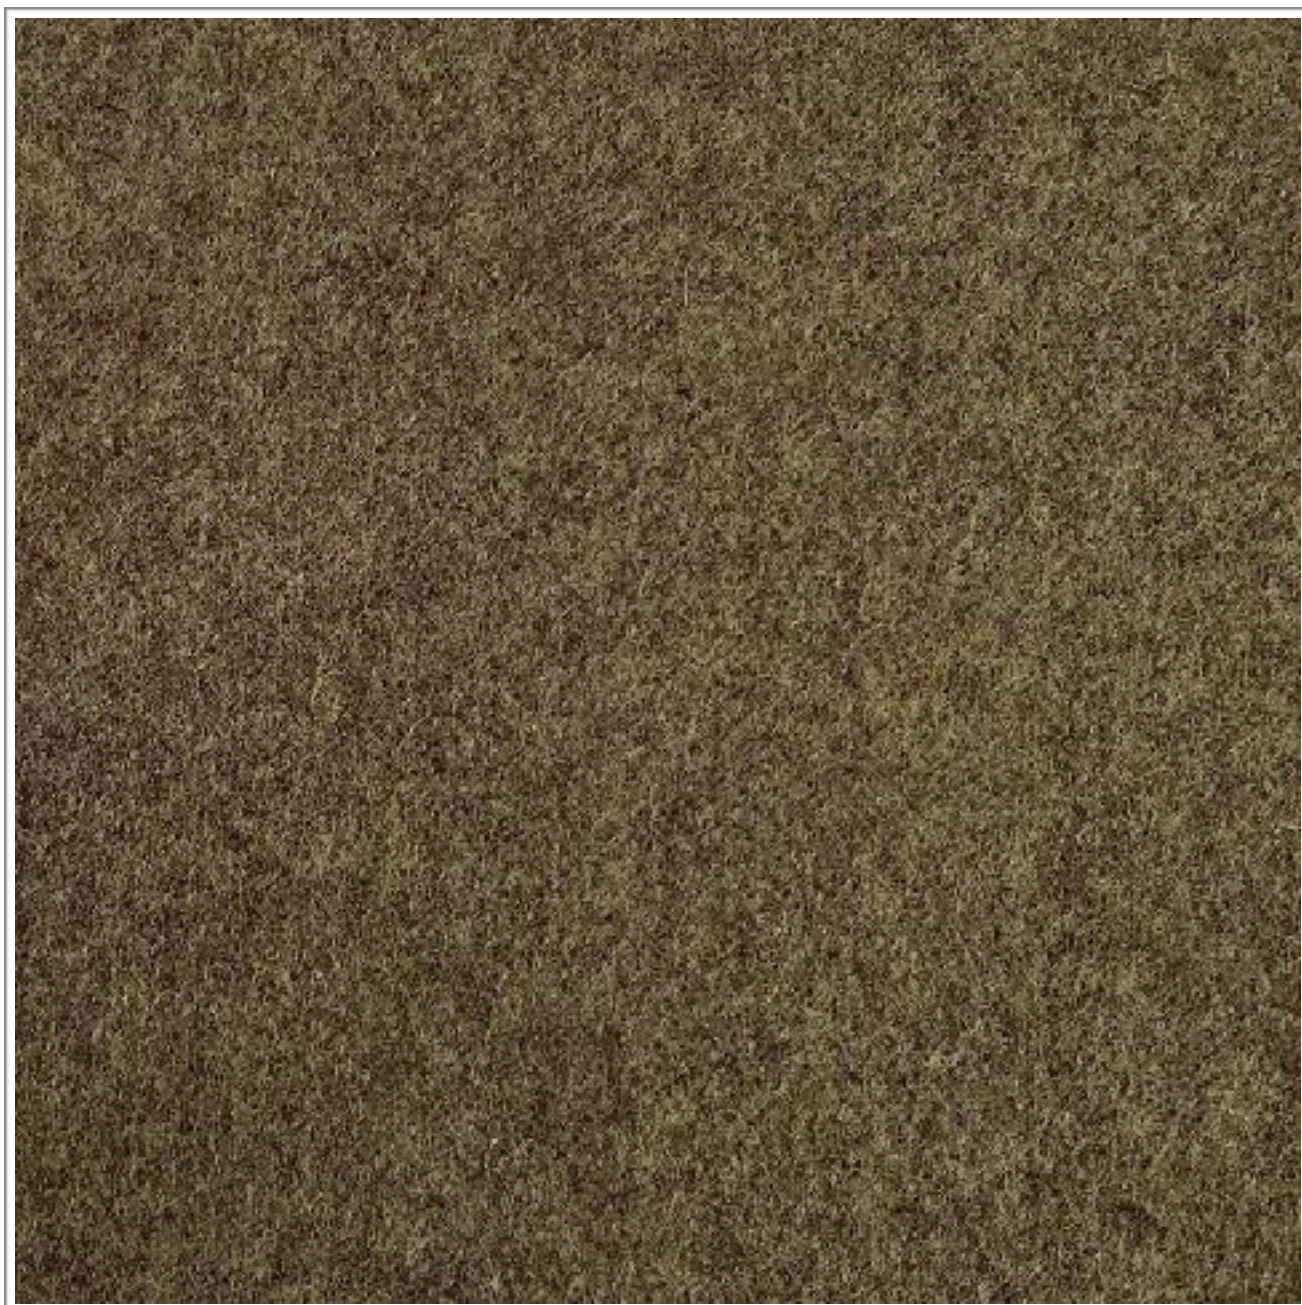

Photographic fabric scans are not colour accurate. Always request actual fabric samples before ordering.

## SPECIFICATIONS

<b>Application</b>	<b>Workplace, Education. When FR Treated: Hospitality &amp; Leisure</b>
<b>Composition</b>	<b>95% Virgin Wool, 5 % Polyamide</b>
<b>Width</b>	<b>140cm Minimum</b>
<b>Mass</b>	<b>400gm<sup>2</sup> +/- 5%</b>

---

		<b>STANDARD</b>	<b>SYNERGY</b>
<b>Abrasion Resistance:</b>		<b>25 000 Rubs</b>	<b>+100 000 Rubs</b>
<b>Colour Fastness:</b>			
<b>To Light</b>		<b>5</b>	<b>5</b>
<b>To Rubbing</b>		<b>4</b>	<b>4</b>
<b>Seam Slippage:</b>	<b>Warp</b>	<b>180N</b>	<b>+180N</b>
	<b>Weft</b>	<b>180N</b>	<b>+180N</b>
<b>Tensile Strength:</b>	<b>Warp</b>	<b>400N</b>	<b>+400N</b>
	<b>Weft</b>	<b>400N</b>	<b>+400N</b>
<b>Cleaning Instructions:</b>		<b>Vacuum Regularly. Professional dry clean or wipe clean with a damp cloth</b>	

**NOTE: Refer to SABS 726 - This specification calls for a minimum seam of 15mm and 4-5 stitches per cm.**