
SYNERGY ENGAGE

Weavers World

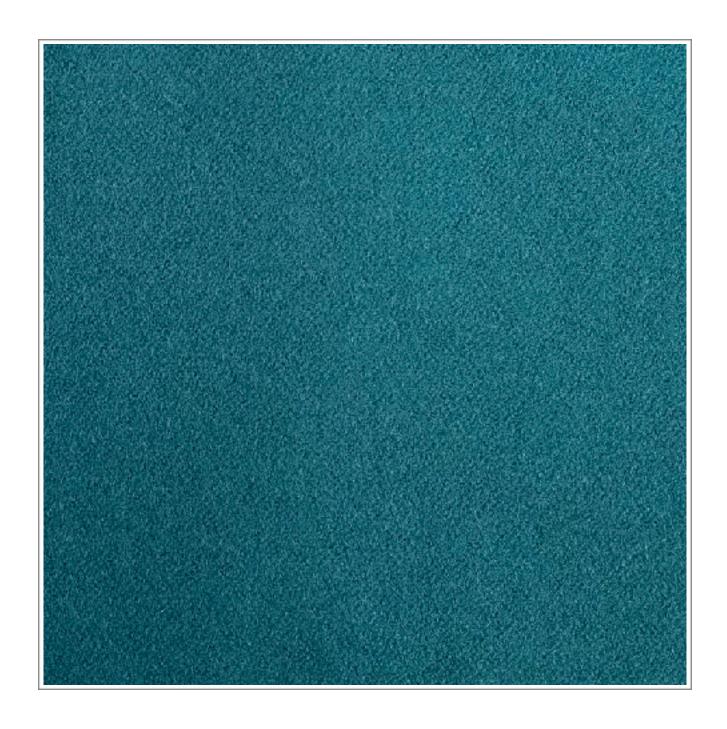

Photographic fabric scans are not colour accurate. Always request actual fabric samples before ordering.

SPECIFICATIONS

Application Workplace, Education.

When FR Treated: Hospitality & Leisure

Composition 95% Virgin Wool, 5 % Polyamide

Width 140cm Minimum

Mass 400gm² +/- 5%

STANDARD SYNERGY

Abrasion Resistance: 25 000 Rubs +100 000 Rubs

Colour Fastness:

To Light 5 5

To Rubbing 4 4

Seam Slippage: Warp 180N +180N

Weft 180N +180N

Tensile Strength: Warp 400N +400N

Weft 400N +400N

Cleaning Instructions: Vacuum Regularly. Professional dry clean or wipe clean

with a damp cloth

NOTE: Refer to SABS 726 - This specification calls for a minimum seam of 15mm and 4-5 stitches per cm.